

# Router ADSL2/2+ Wireless 54Mbps Ethernet 4 ports



## It

- Supporta ANSI T1.413 Issue 2; ITU G.992.1 (G.dmt) Annex A; ITU G.992.3 ADSL2 (G.dmt.bis); ITU G.992.5 ADSL2+; Extended Reach (READSL2)
- Velocità Massima di downloads 8Mbps for ADSL, 24 Mbps for ADSL2+; Velocità massima di uploads 1 Mbps
- Web-based GUI; Remote Log
- IP filter, IP forwarding, IPQoS, Firewall
- DHCP server; NAT, DHCP, DMZ
- PPP over ATM (PPPoA) PPP over Ethernet (PPPoE), IP over ATM (IPoA) MAC Encapsulation Routing (MER), Bridging
- Access Point integrato; supporta 802.11b, 802.11b+, 802.11g; 4 porte Ethernet, supporta 8 PVCs
- Supporta la criptazione WEP 64, 128, 256 bits, 802.1x e autenticazione WPA
- Supporta l'SSID nascosto, MultiSSID, Isolamento dell'utente e filtro sui MAC address

## En

- Supports: ANSI T1.413 Issue 2; ITU G.992.1 (G.dmt) Annex A; ITU G.992.3 ADSL2 (G.dmt.bis); ITU G.992.5 ADSL2+; Extended Reach (READSL2)
- Maximum download speed: 8Mbps for ADSL, 24 Mbps for ADSL2+; Maximum upload speed: 1 Mbps
- Web-based GUI; Remote Log
- IP filter, IP forwarding, IPQoS, Firewall
- DHCP server; NAT, DHCP, DMZ
- PPP over ATM (PPPoA) PPP over Ethernet (PPPoE), IP over ATM (IPoA) MAC Encapsulation Routing (MER), Bridging
- Integrated Access Point; supports 802.11b, 802.11b+, 802.11g; 4 Ethernet ports, 8 PVCs supported
- WEP 64,128,256 bits encryption, 802.1x and WPA authentication support
- Hidden SSID, MultiSSID, user isolation and MAC address filtering support

## Fr

- Supporte ANSI T1.413 Issue 2; ITU G.992.1 (G.dmt) Annexe A; ITU G.992.3 ADSL2 (G.dmt.bis); ITU G.992.5 ADSL2+; Extended Reach (READSL2),
- Vitesse Maximale de chargement 8Mbps for ADSL, 24 Mbps for ADSL2+; Vitesse maximale de téléchargement
- Web-based GUI; Remote Log
- IP filter, IP forwarding, IPQoS, Firewall
- DHCP server; NAT, DHCP, DMZ
- PPP over ATM (PPPoA) PPP over Ethernet (PPPoE), IP over ATM (IPoA) MAC Encapsulation Routing (MER), Bridging
- Access Point intégré; supporte 802.11b, 802.11b+, 802.11g; 4 ports Ethernet, Supporte 8 PVCs
- Supporte le cryptage WEP 64,128,256 bits, 802.1x et l'authentification WPA
- Supporte le SSID masqué, MultiSSID, Isolement de l'utilisateur et filtre sur les adresses MAC

## Es

- Soporta ANSI T1.413 Issue 2; ITU G.992.1 (G.dmt) Annex A; ITU G.992.3 ADSL2 (G.dmt.bis); ITU G.992.5 ADSL2+; Alcance extendido (READSL2)
- Velocidad máxima de descarga 8Mbps para ADSL, 24 Mbps con ADSL2+; Velocidad máxima de carga 1 Mbps
- Interfaz gráfica de usuario basada en internet; Log remoto
- Filtro IP, IP reenvío (forwarding), IPQoS, Cortafuegos
- Servidor DHCP, NAT, DHCP, DMZ
- PPP sobre ATM (PPPoA) PPP sobre Ethernet (PPPoE), IP sobre ATM (IPoA) MAC Encapsulation Routing (MER), Encaminamiento
- Punto de acceso integrado; soporta 802.11b, 802.11b+, 802.11g; 4 puertos Ethernet, Soporta 8 PVCs
- Soporta encriptado WEP 64,128,256 bits, 802.1x y autenticación WPA
- Soporta el SSID oculto, MultiSSID, Aislamiento del usuario y filtro en las direcciones MAC



## Specifications

### WAN

- Bridge, RFC 2684 Support
- CLIP Classic IP Over ATM Support
- DHCP Support IP address assigned from DHCP server link mode
- Static Support static IP address link mode
- PPPoE/PPPoA Firewall and NAT support, Debug Mode, Dial on Demand, MRU, User authentication (PAP/CHAP) with PPP, Session Keep Alive

### LAN

- DHCP Server/ Client/ Relay
- IP Address, Domain name and gateway configuration

### Advanced

- uPnP, Support uPnP function
- SNMP, V1,V2 support
- IP QoS, support connection Quality control
- ToS, support
- Remote Log. Functions for remote system diagnoses
- IP forwarding, DMZ support, VPC Pass Through, Custom ip rules, Famous games and APPs port preset
- IP Filter, Custom ip rules, Famous games and APPs port preset
- Access Control, LAN and WAN side Access Control
- Password protected, supporting

### WIRELESS


- 802.11 MODE, 802.11b, 802.11g, 802.11n
- Security, 64,128,256 bits WEP encryption, 802.1x and WPA authentication support SSID hidden, MultiSSID, User Isolation and MAC address filtering

### Management

- Syslog, Display Syslog, Remote Syslog
- Reboot/Restore Factory Default Setting
- Telnet Access
- Firmware Upgrade, Support. Local Upgrade Available
- Configuration Management, Web-based configuration in English
- Operating System Windows95, 98, 98SE, Me, 2000, NT4.0, Xp, & WINDOWS VISTA

### ETHERNET Interface

- 4 port 10/100 Mbps Ethernet connection

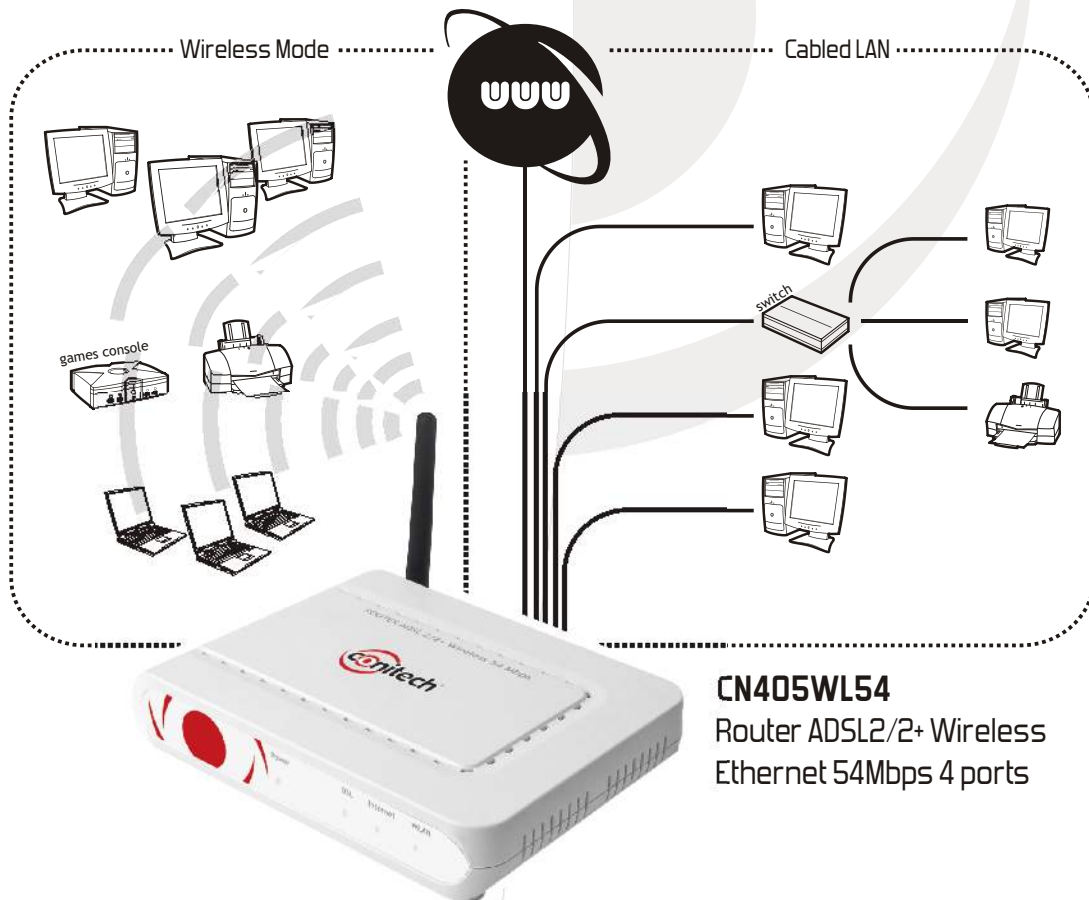

### CN405WL54

Router ADSL2/2+ Wireless  
Ethernet 54Mbps 4 ports